



RF

- A MIFARE® USB
- B Temic USB
- C EM

- 1
- 2
- 3
- 4



Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤ 15 μA
Card reading current	≤ 20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

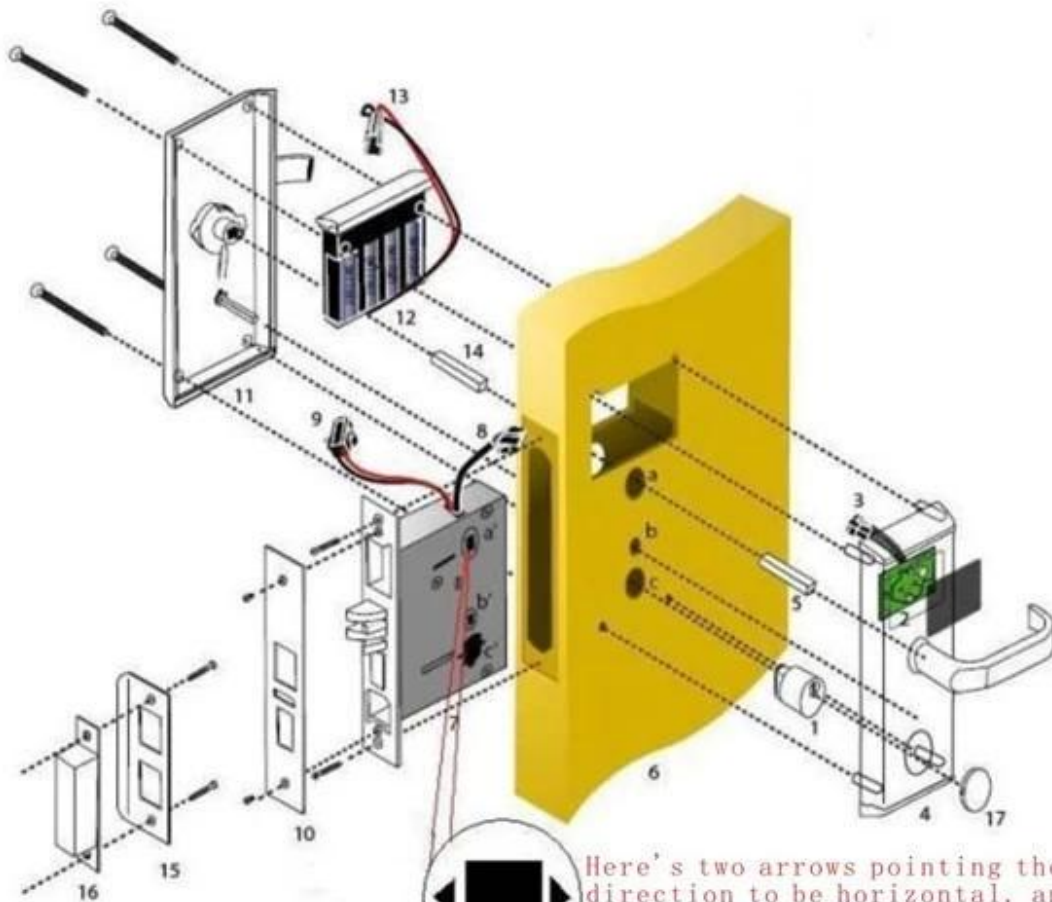

Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

□□□□□□



□□□□□□□□



lock

-
-
-
-
-
-
-



RF card



RF card reader
(used for issuing room card to guests)



Data collector



opening the door with RF card



collect opening records from hotel lock

proyu.en.alibaba.com