RF□□□□□□□

A□□□□□□□MIFARE®□□□□USB□□□□□□□□□□
B□□□□□□□□□□□USB□□□□□□□□□□
C□EM□□□□□□□□□□□□□□□□

□□□□□□□□□□□

1□ □□□Zink□□□□□□□□□□□□□□□□□□□□□□□□□□

2□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□

3□ □□□□□□□□□□□□□□□□□□□□□□□□□□

4□ □□□□□□□□□□□□□□□□ □□□

□□□□□

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

□□□□□□□□RF□□

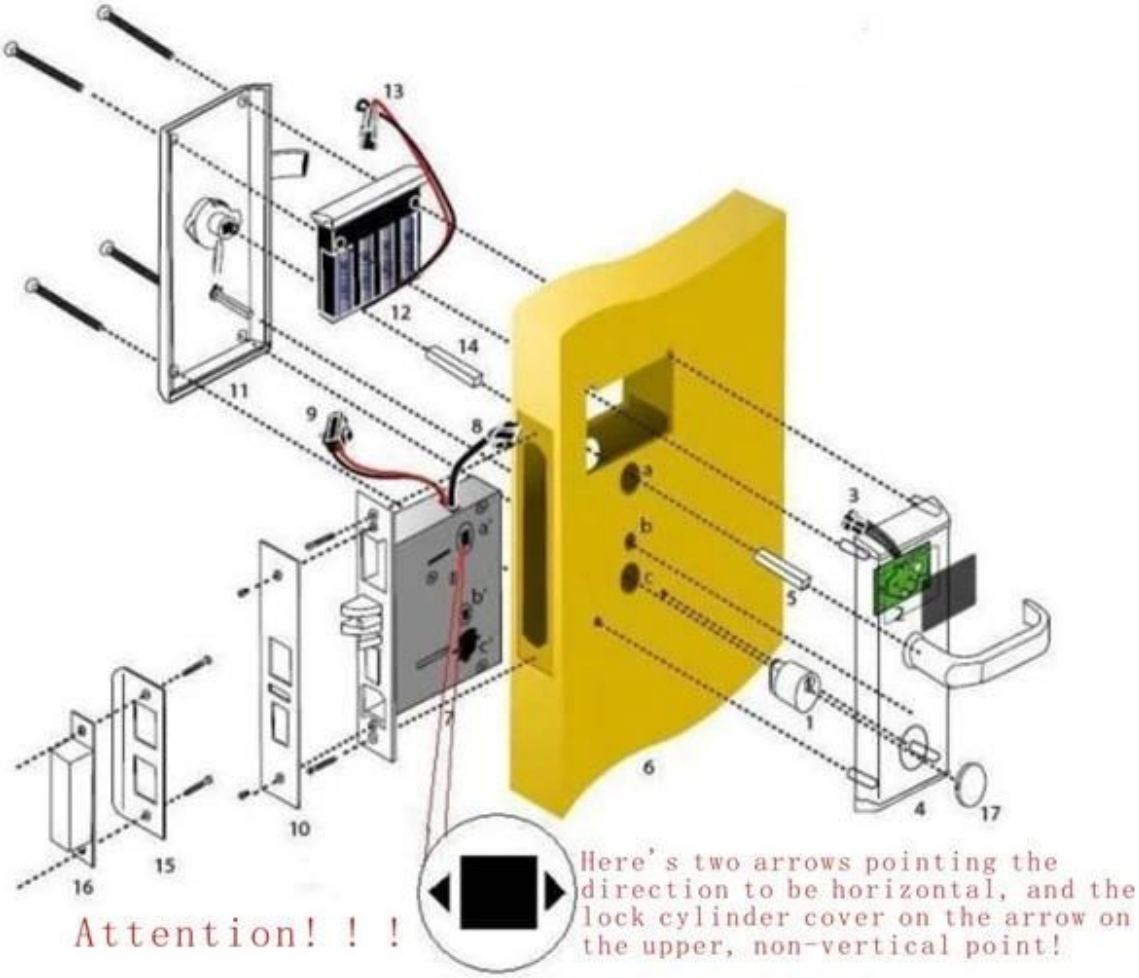
13
12
14
11
9
8
a
b
c
3
5
2
1
6
4
17
10
15
16
Attention! ! !
Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

RF

EC Certificate of Conformity
EMC

Verification of Conformity
FCC

Certificate of Conformity
RoHS

Lock[illegible]

- [illegible]

- [illegible]

- [illegible]

- [illegible]

- [illegible]/[illegible]/[illegible]

- [illegible]PC[illegible]

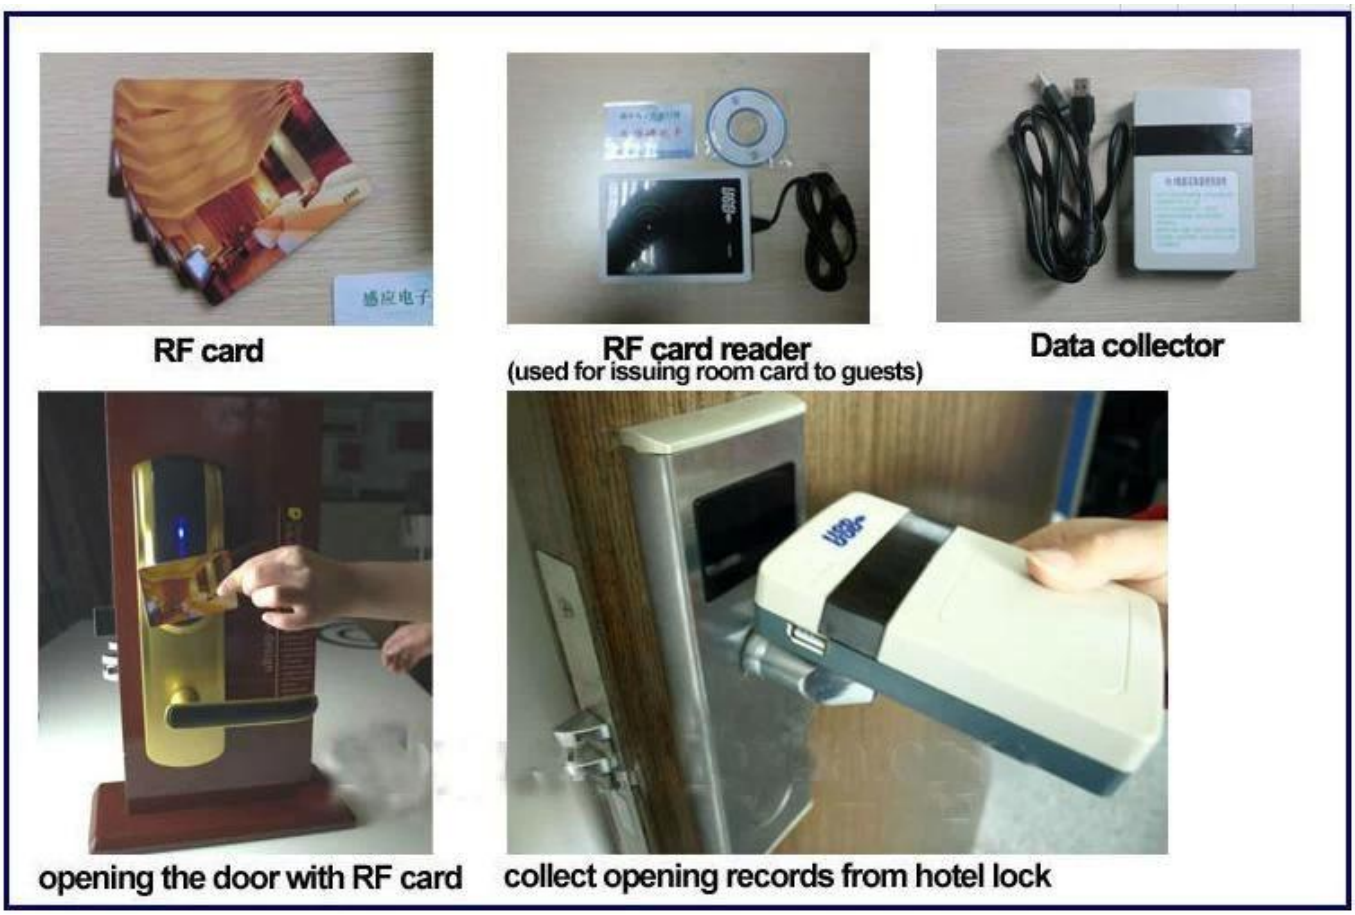
RF card
RF card reader
(used for issuing room card to guests)
Data collector
opening the door with RF card
collect opening records from hotel lock

RF□□□□□□□□□□□□□□□□□□□□□□