

## RF

- A MIFARE® USB
- B USB
- C EM

1 Zink


2

3

4

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	$\leq 15 \mu\text{A}$
Card reading current	$\leq 20 \text{ mA}$
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	$>25\text{mm}$
Working temprature	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Working humidity:	$\leq 80\%$

RF

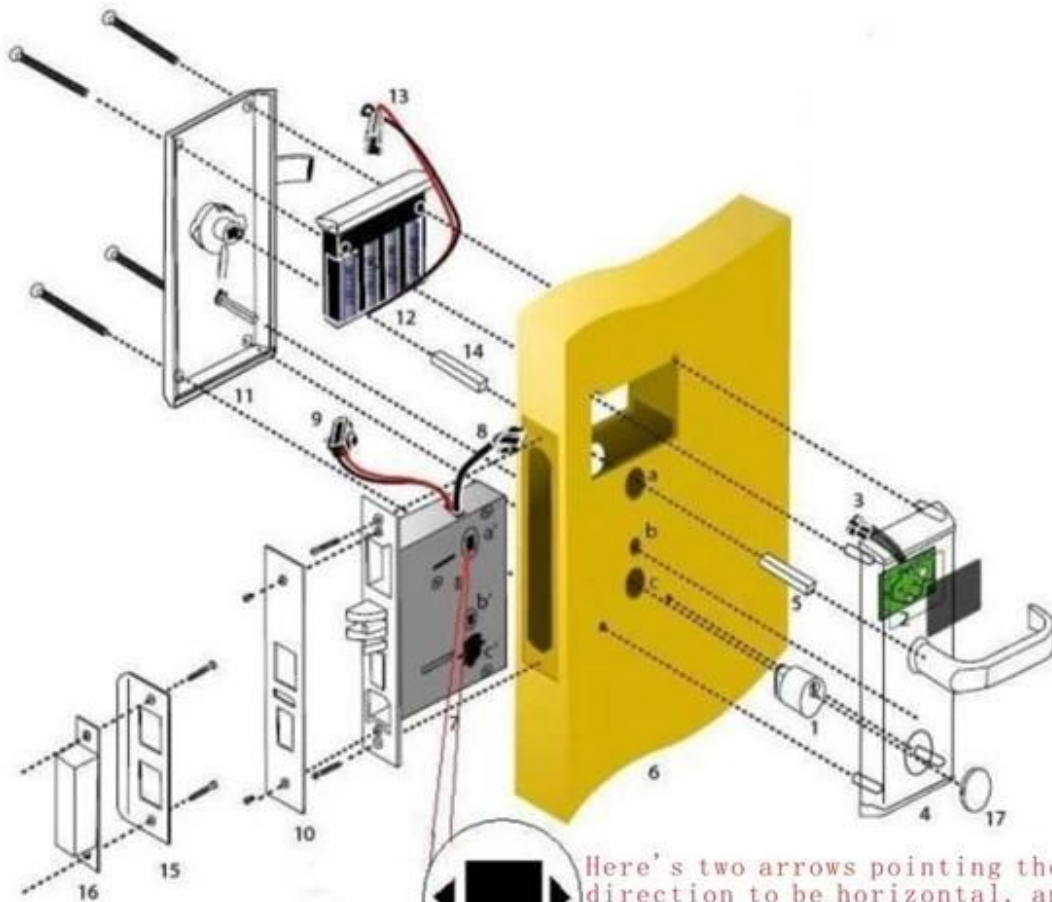

Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

RF



RF



## Lock

- 
- 
- 
- 
- 
- 
-



**RF card**



**RF card reader**  
(used for issuing room card to guests)



**Data collector**



opening the door with RF card



collect opening records from hotel lock

RF