

□□□□□□□□

- A: MIFARE® □ □□ USB □□□□□□□□□□□□□□
- B: Temic □□□□□□□□ USB □□□□□□□□□□□□□□
- C: EM □□□□□□□□□□ □□□□□□□□


□□□□□□□□□□

- 1□ □□□□□□□□□□□□□□□□ □□□□□□□ □□□
- 2□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
- 3□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
- 4□ □□□□□□□□□□□□□□□□ □□□□

□□□□□

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤ 15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

□□□□□□□□□□

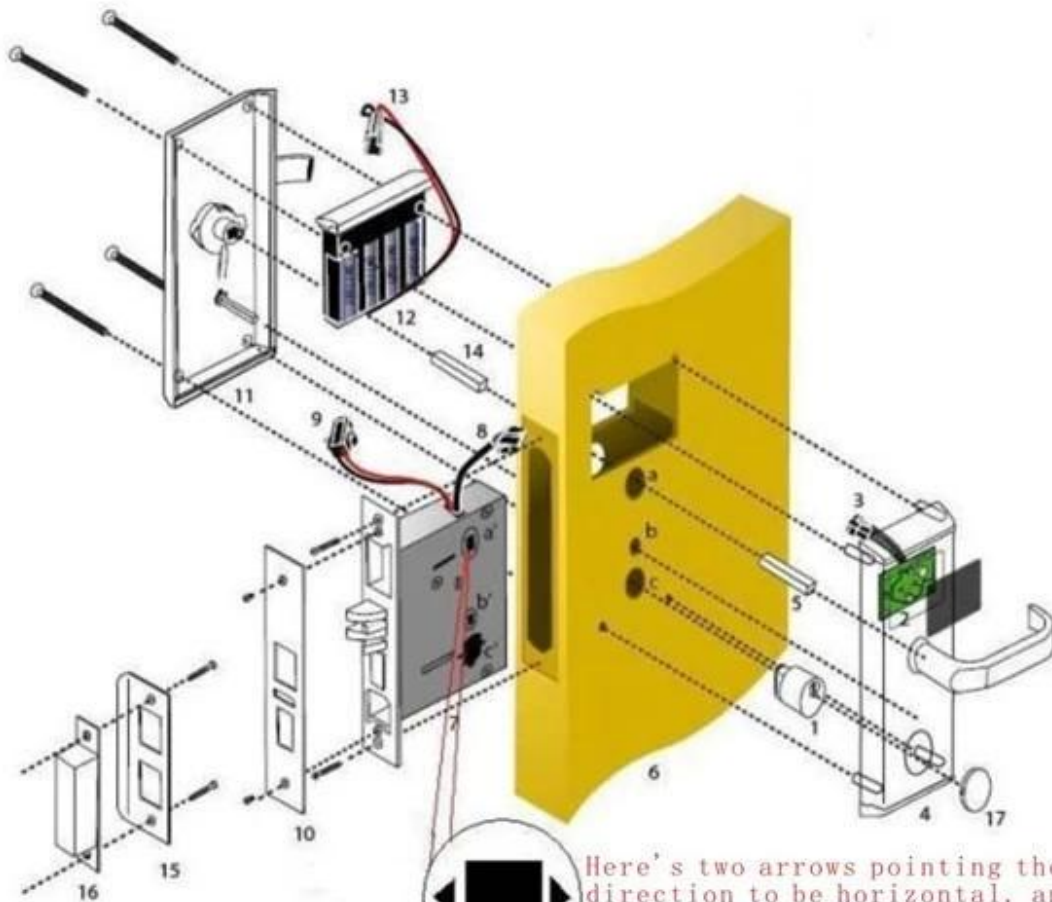

Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

□□□□□□



□□□□□□□□□□



RF card



RF card reader
(used for issuing room card to guests)



Data collector



opening the door with RF card



collect opening records from hotel lock

www.proyu.com Temic www.proyu.com Temic