

RFID 卡 PY-8821-1

說明:

Mifare® 1K MIFARE® MIFARE® wil paking high MIFARE®


特點:

- 1. MIFARE®
2. MIFARE®
3. system 2
4. 50
5. inputting 12
6.
7.
8.
9.

規格:

- 1. 6.0V
2. 100µA
3. 200mA
4.
5. 4.5V
6. > 25mm
7. temperature: 0 -70
8. ≤80%

包裝:

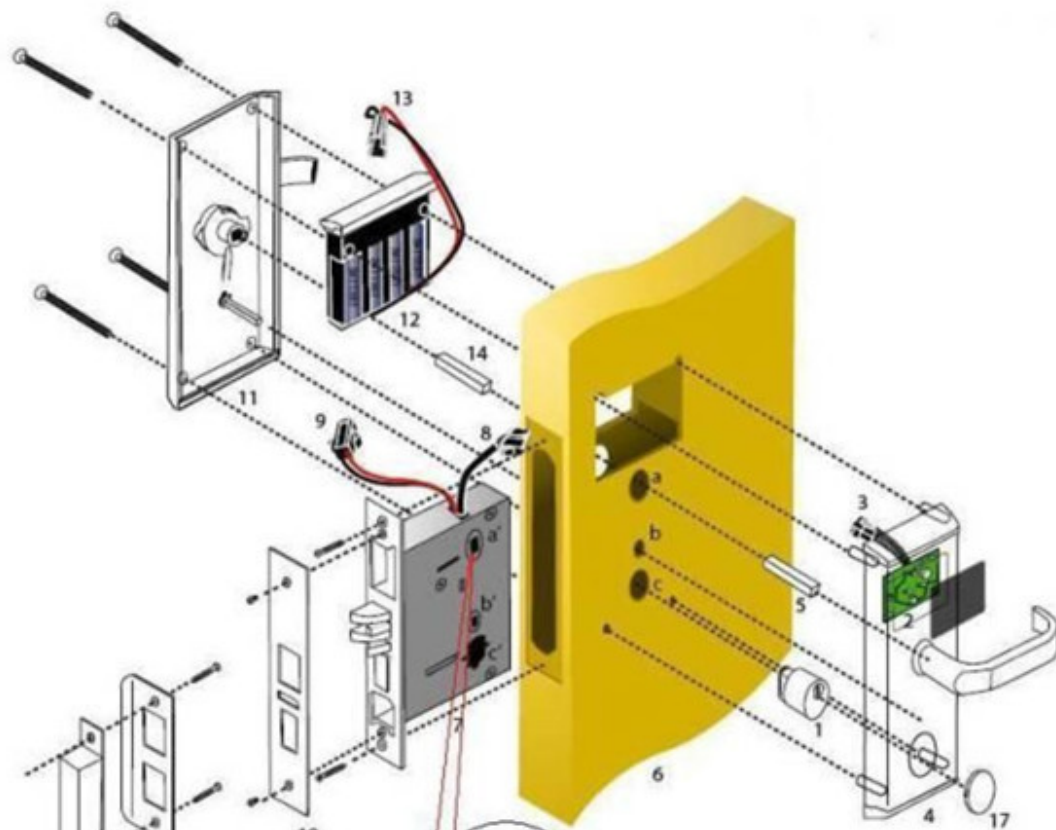


Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

□□ □□□□ □□ □□, □□ □□□□ □□ □□□□ (□□□□ □□ □□□□) □□ □□□□□□ □□ □□□□ □□ □□ □□□□□□ □□ □□□□□□ □□□□□□ □□□□□□

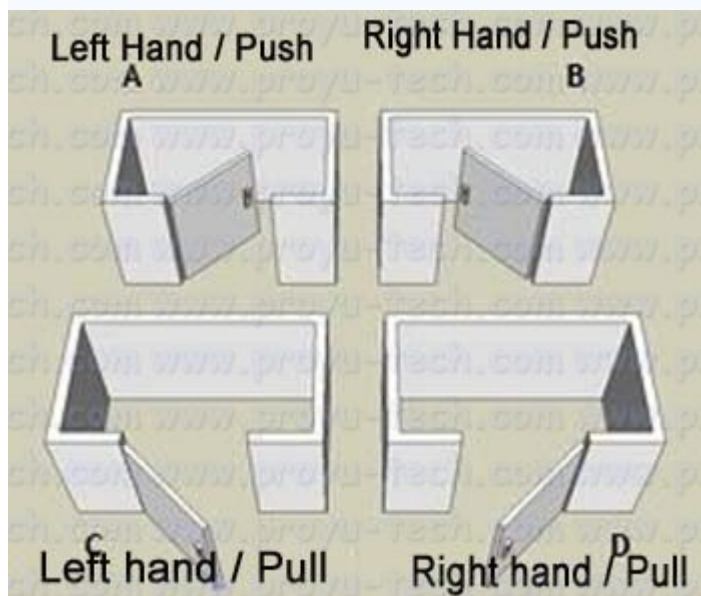

□□□□□□ □□□□□□ □□:





