

0000 0000 0000 000000 000:

- 00: 0000 000 00 000 MIFARE® 000000, (0000000 000000 000000 00 0000000000 00 000 0000000)
- 00: TEMIC 000000 0000 00000, (00000000 000000 0000000 00 00000000000 00 000 00000000)
- 00: 000 00000 00000, (00000000 0000000000000, 000 00000000 00000 000000000000)

000000 00000 00 00000000 0000 00 000000 000000000000

10 00 00000 000000000 00 00000000 0000000000 00 0000 00 0000 zink 0000000 00000 (00000000000 000000 00 000000) 00 00000 0000

20 00000000 00 ntellectual 0000000000 00000 000000 0000, 00 000 00000 0000 00000 00 0000 0000 0000000 00 0000000 000000 0000


30 00: 0000000 0000000, 00000000 00000000 00 00000000 00 00 0000000 00000 00 0000000 00 000000 0000 0000 0000 00000 00000 0000

40 00 00000 00000 00 000000000000 00000 00 0000 00 00000000 0000000 00 0000000000 00000

00000000 00000000:

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

000000 00000 0000000 00000 00000 0000000000 00000

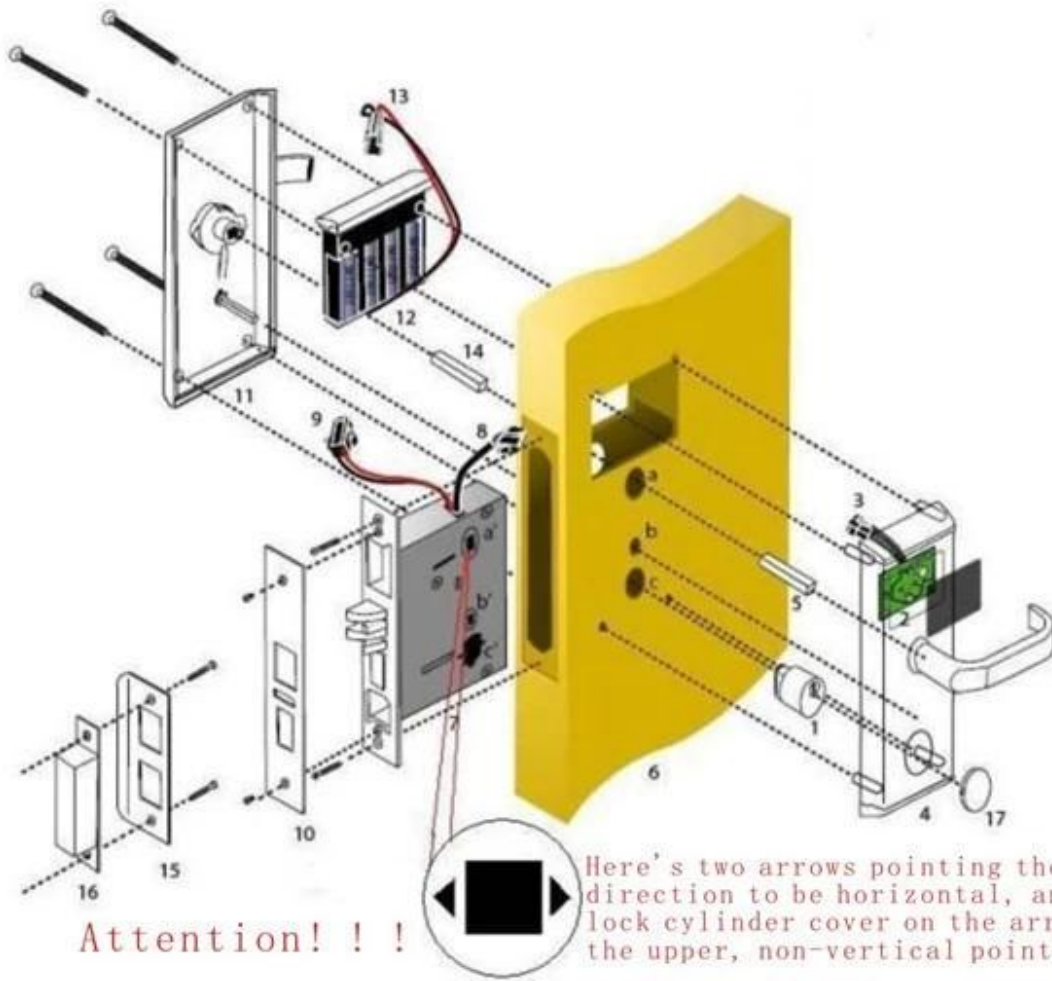

Attention!!! Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

□□□□ □□□□ □□□□ □□□□ □□ □□ □□□□ □□□□





□□□□ □□□□□□ □□ □□□ □□□□ □□□□□









**RF card**



**RF card reader**  
(used for issuing room card to guests)



**Data collector**



opening the door with RF card



collect opening records from hotel lock