

RF tijd aanwezigheid met toegangscontrole PY-SC403

Parameters:

B
d
e
n
t
i
t
e
i
t
s
k
a
a
r
t
c
a
p
a
c
i
t
e
i
t
5
a
p
a
c
i
t
e
i
t
v
a
n
d
e
t
r
a
n
s
a
c
t
i
e

T 6 Ph m U A + B S 2 B 2 / 4 8 5 , U S B - H o s t

A
e
p
a
s
t
C
p
a
t
e
b
t
f
i
s
t
a
e
f
a
c
k
y
d
e
u
r
s
e
n
s
o
r
,
d
e
k
n
o
o
p
v
a
n
d
e
u
i
t
g
a
n
g
,
a
l
a
r
m
,
d
e
u
r
b
e
l

W
ü
e
g
a
n
&
s
h
a
n
g
o
a
l
a
h
a
n
d
p
a
s
s
d
a
o
k
t
s
M
s
S
o
p
b
i
p
h
e
l
e
f
W
o
c
k
c
e
d
e
,

Y
ø
€
B
C
n
g
B
€
d

b
þ
€
s
t
e
m
p
e
r
a
t
u
u
r
P
%

€
%

v
o

c

h

t

i

g

h

e

i

d

b

i

j

g

e

b

r

u

i


k

D
2
B
e
5
K
4
8
W
5
H
)
m
m
B
7
K
G
o
g
e
w
i
c
h
t

Toepassing: kantoor, huis, school, regering, gebouw, of ander doel.



Standalone

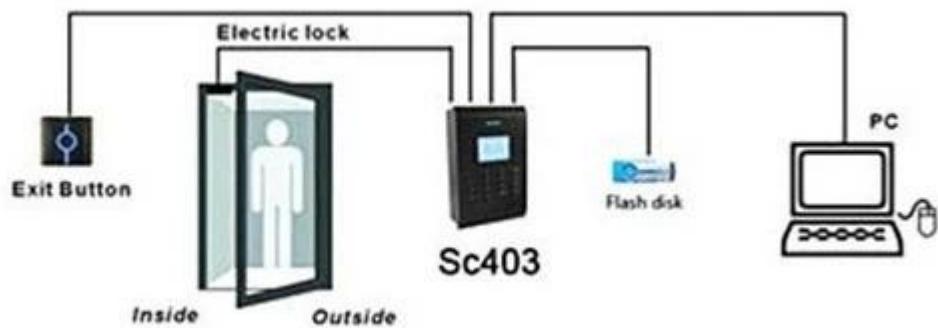

Network

