

RF 無線電波通訊模組規格說明書:

: Mifare ® 無線電波通訊模組 (USB 無線電波通訊模組)

B: 無線電波通訊模組 Temic (USB 無線電波通訊模組)

C: EM 無線電波通訊模組 (無線電波通訊模組)

無線電波通訊模組規格說明書

1 無線電波通訊模組 (Zink) 無線電波通訊模組

2 智慧財產權 無線電波通訊模組 無線電波通訊模組


3 無線電波通訊模組 無線電波通訊模組

4 無線電波通訊模組 無線電波通訊模組

RF 無線電波通訊模組:

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

無線電波通訊模組 **RF** 無線電波通訊模組

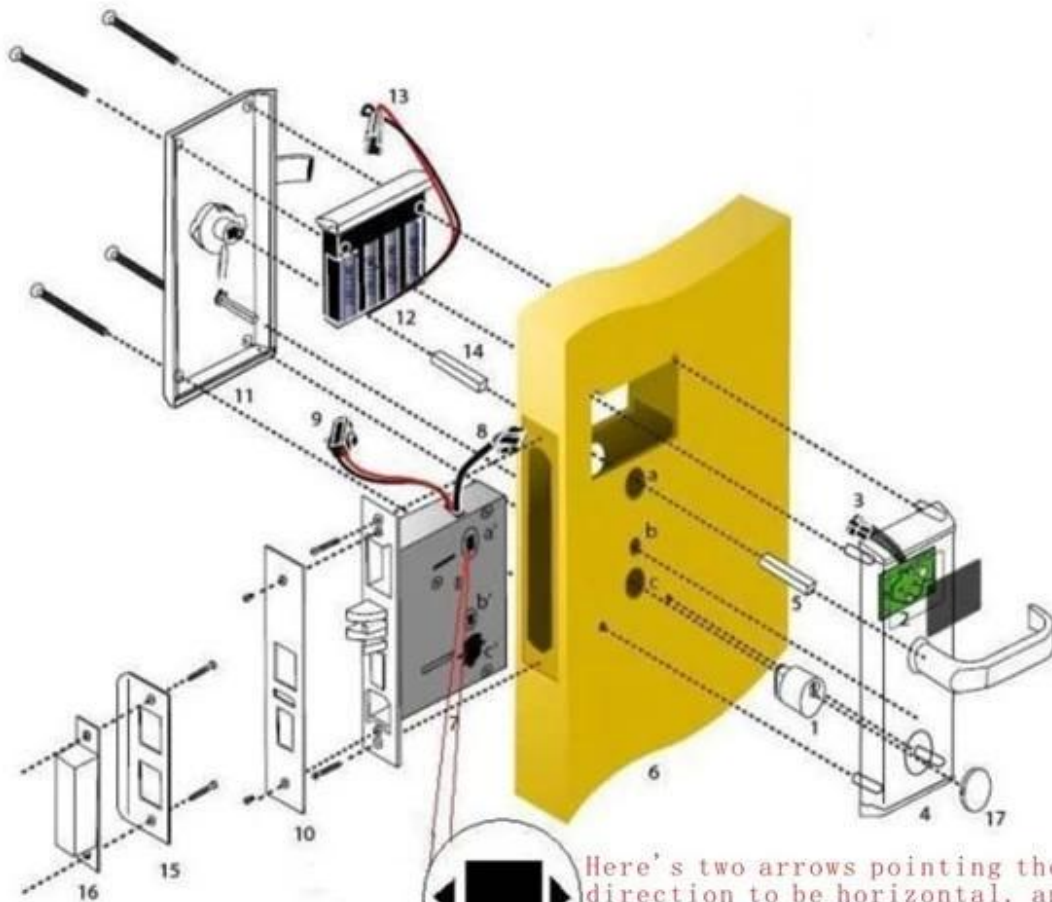

Attention!!!



Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!

RF



RF



LOCK [unclear]

- [unclear] (unclear), [unclear], [unclear], [unclear] one.Also [unclear] [unclear] [unclear] system..as [unclear]

- [unclear]

- [unclear] easily..and [unclear] [unclear]

- [unclear]

- [unclear] / [unclear] / [unclear]

- [unclear]



RF card



RF card reader
(used for issuing room card to guests)



Data collector



opening the door with RF card



collect opening records from hotel lock