

RF Lock Installation :

- A: MIFARE®
- B: Temic Card,
- C: EM,


Hotel Lock Installation

Installation Instructions

1. Remove the Zink (battery cover) from the lock cylinder cover.
2. Remove the battery cover from the lock cylinder cover.
3. Remove the battery cover from the lock cylinder cover.
4. Remove the battery cover from the lock cylinder cover.
5. Remove the battery cover from the lock cylinder cover clew.

Installation

Installation Instructions

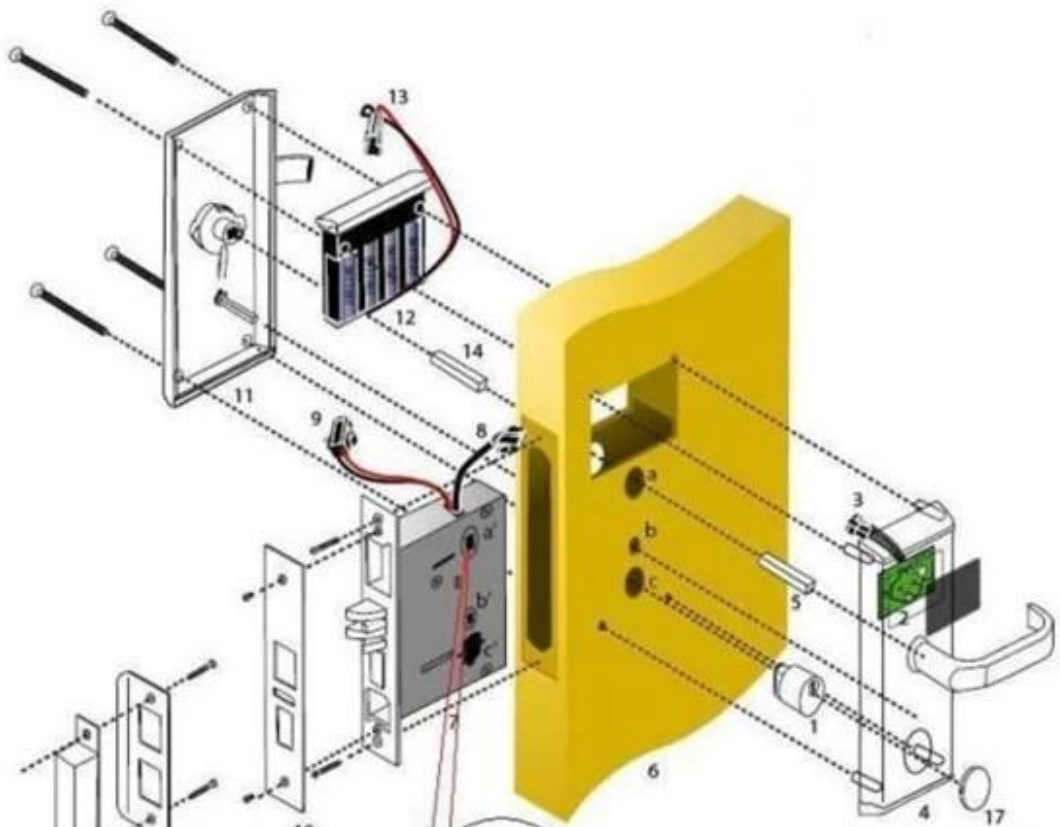

Attention!!! Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!



RF card



RF card reader
(used for issuing room card to guests)



Data collector



opening the door with RF card



collect opening records from hotel lock