

RF :

A: MIFARE® ( USB )

B: Temic card ( USB )

C: EM ( )

1 Zink ( )


2 intellectual ( )

3 ( )

4 ( )

:

Working voltage	6.0V (4 pieces of No.5 alkaline batteries)
Static current	≤15 μA
Card reading current	≤20 mA
Lifespan of batteries	10 months or above
Indication of lacking voltage	4.8V
Induction distance	>25mm
Working temprature	-20`C~70`C
Working humidity:	≤80%

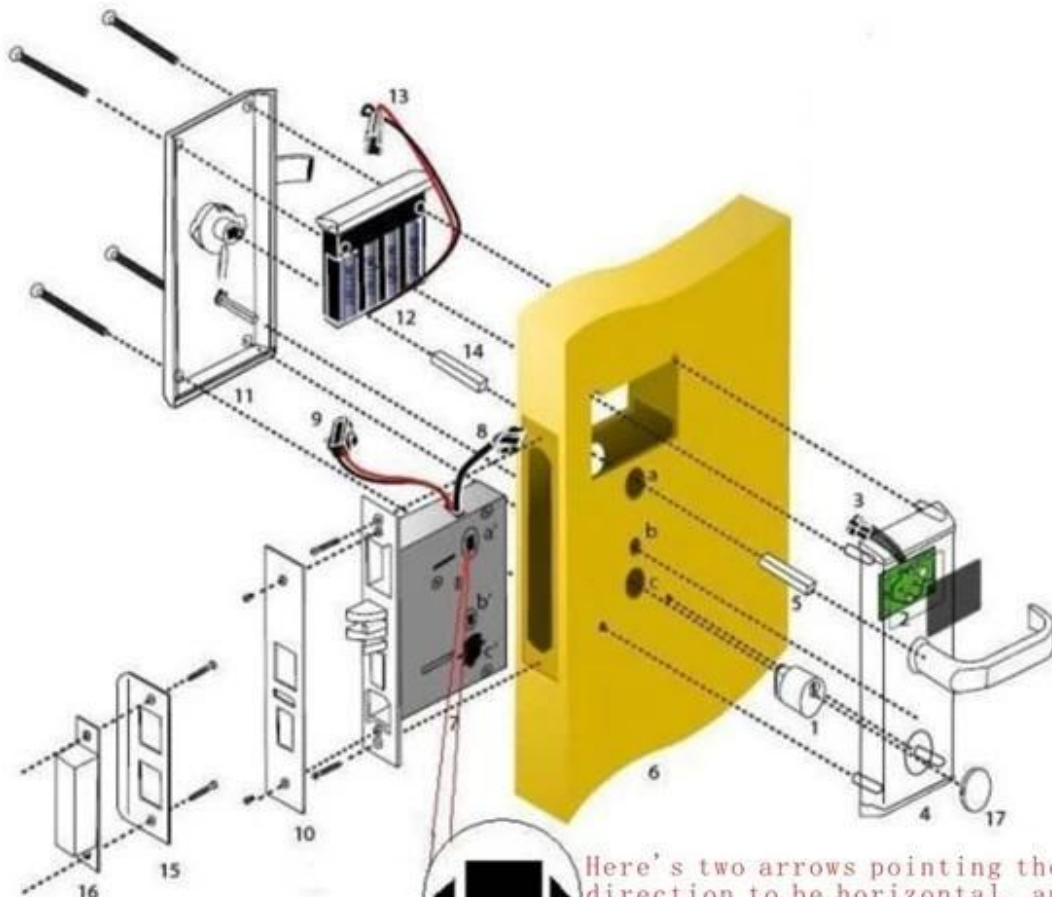

Attention!!!

Here's two arrows pointing the direction to be horizontal, and the lock cylinder cover on the arrow on the upper, non-vertical point!





**Lock** [REDACTED]

- [REDACTED] (REDACTED), REDACTED, REDACTED, REDACTED, REDACTED  
REDACTED, REDACTED .. REDACTED

- [REDACTED]

- [REDACTED]  
REDACTED

- [REDACTED]  
REDACTED

- [REDACTED] / [REDACTED] / [REDACTED]

- [REDACTED]



**RF card**



**RF card reader**  
(used for issuing room card to guests)



**Data collector**



opening the door with RF card



collect opening records from hotel lock

RF ID IC